
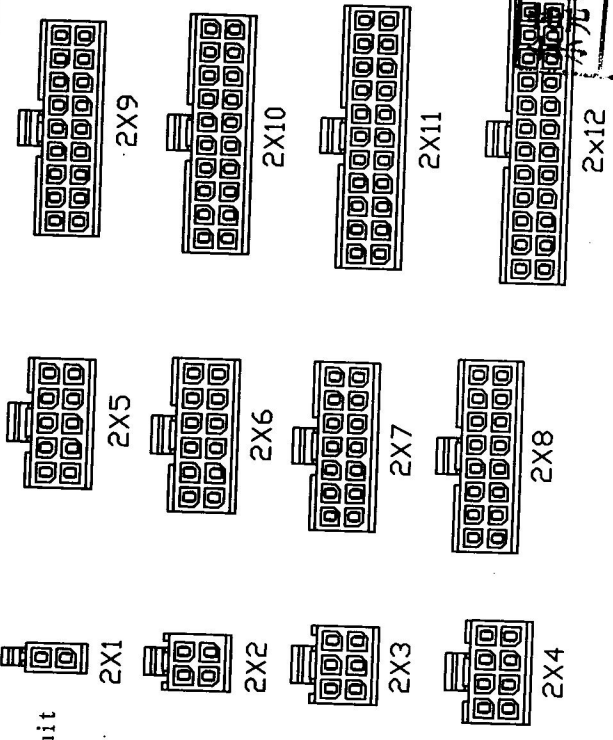


colour:


B	Black
W	White
N	Natural

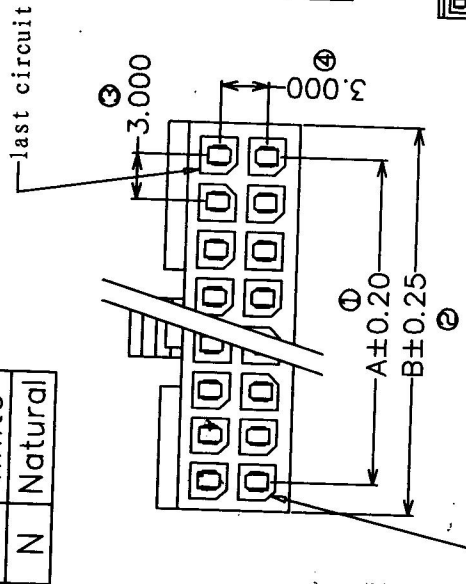

**SPECIFICATIONS:**

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -25°C ~ +85°C
- Contact resistance: 10mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Withstanding Voltage: 1500V AC/minute
- Material: Nylon66 UL94V-2
- UL File No: E304945
- Distribution: T3025 Series
- Terminal/Housing Retention Force
- Requi rements: 2.5kg(min)
- Part NO: P3025-2xN-B-H

东莞市鸿儒电子有限公司  
2011-2-15  
图面发行章

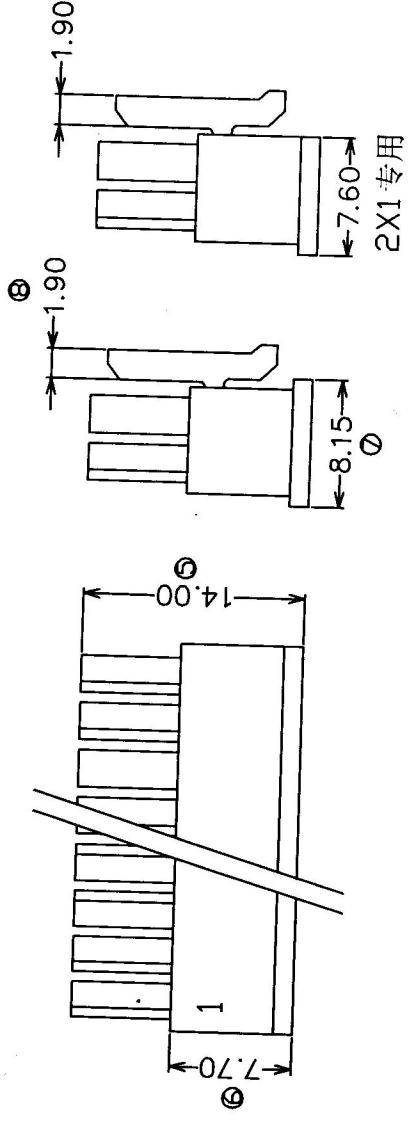

Part No	Dim: A	Dim: B	Packing Qty/Bag	Tolerance
2x1	5.30	18.00	1000pcs	+0.30 -0.25
2x2	3.00	21.00	6.85/1000pcs	+0.30 -0.25
2x3	6.00	24.00	9.85/1000pcs	+0.30 -0.25
2x4	9.00	27.00	12.85/1000pcs	+0.55 -0.25
2x5	12.00	30.00	15.85/1000pcs	+0.55 -0.25
2x6	15.00	33.00	18.85/1000pcs	+0.55 -0.25
2x7	18.00	36.85	21.85/500pcs	+0.55 -0.25
2x8	21.00	40.00	24.85/500pcs	+0.55 -0.25
2x9	24.00	43.85	27.85/500pcs	+0.55 -0.25
2x10	27.00	47.00	30.85/400pcs	+0.55 -0.25
2x11	30.00	50.00	33.85/400pcs	+0.55 -0.25
2x12	33.00	53.85	36.85/250pcs	+0.55 -0.25



东莞市鸿儒电子有限公司  
HongRu Connector co., ltd

UNIT: mm  
Tolerance:  
.000 ±0.10  
.00 ±0.20  
.0 ±0.30

Part name (零件名称)	P3025-2xN-B-H	Edition (版本)	C	Date (日期)	2011.02.14
drawing number (图号)	CRS009-02				

Drawing (制图)  
张芳鹏

Confirmation (审核)  
张芳鹏  
2011.02.14